HYDRAULIC SCISSOR LIFT

EET8



GENERAL CHARACTERISTICS


Max. number of workers (indoor/outdoor)	2/-
Rated capacity	230 Kg
Rated capacity of extension platform	120 Kg
Drive speed (stowed)	0 - 4 km/h
Lift speed	0 - 0.8 km/h
Minimum turning radius (inside)	0 m
Minimum turning radius (outside)	1.55 m
Lifting time	18/28 s
Max. allowable tilt angle	3/1.5 °
Max. allowable wind speed	0/0 m/s
Max. allowable side force	400/0 N
Max. climbing angle	25%
Control type	Proportional control
Drive	Dual front wheel
Brake	Dual rear
Tire size	323x100 mm


DIMENSIONS

Max. working height	8.000 mm
Max. platform height	6.000 mm
Overall length	1.840 mm
Overall width	760 mm
Overall height (guardrail unfolded)	2.180 mm
Overall height (guardrail folded)	1.830 mm
Platform size (length x width)	1.640 x 760 mm
Guardrail height	1.100 mm
Platform extension size	900 mm
Ground clearance (stowed)	60 mm
Ground clearance (raised)	15 mm
Wheelbase	1.360 mm

OTHERS

Lift/drive motor power	3.3 Kw
Battery voltage / capacity	6x4 V / 180 Ah
Charger input voltage	100-240 VAC
Charger output current	36 A
Control voltage	24 VDC
Overall weight	1.480 Kg

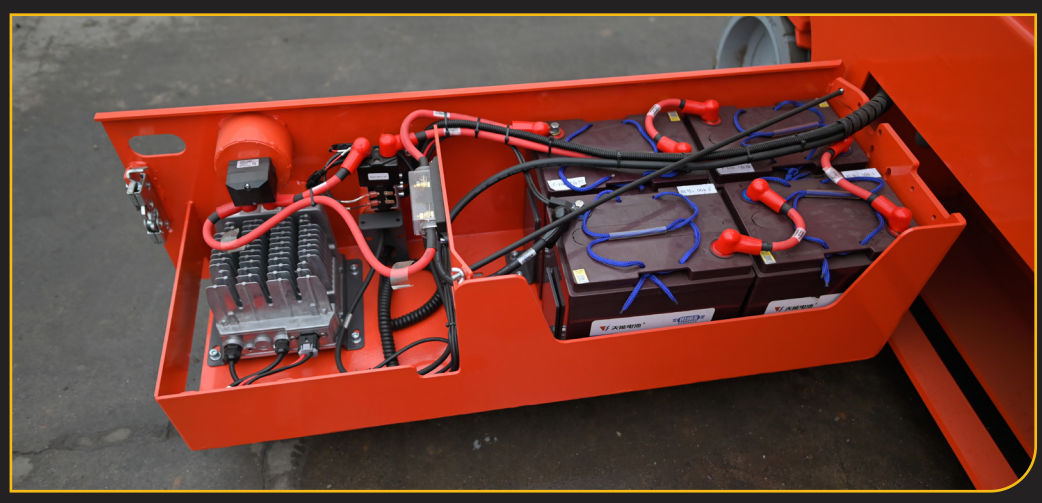

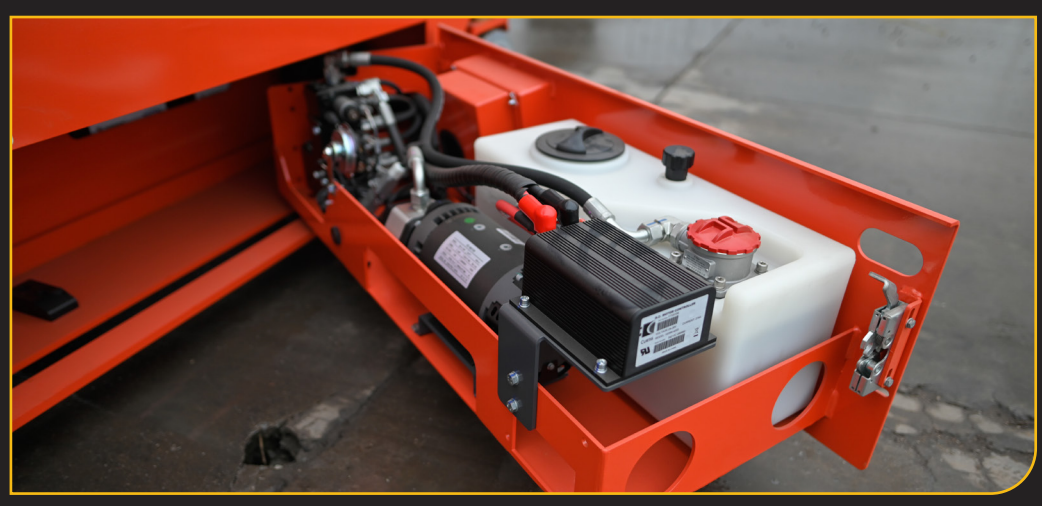

GLOBAL STRENGHTH AND TRADITION

MICHIGAN reserves the right to implement design improvements and changes in specifications at any time, without incurring any obligation to install them on units previously sold. The specifications, descriptions, and illustrative materials contained herein accurately reflect the data known at the time of publication, but may vary by region and are subject to change without prior notice. Illustrations may include optional equipment and accessories and may not include all standard equipment.

MANUFACTURED UNDER THE AUTHORITY OF MICHIGAN GROUP INC.

FLORIDA - USA, FL 33073

MICHIGAN®

michigangroup.us michiganargentina_