

DIESEL FORKLIFT

ME30-45T

OPERATING WEIGHT

Standard configuration,
fuel tank full and 80 kg operator **4.220 kg**

ENGINE

Manufacture	XINCHAI
Model	10582130N.C
Net power	40 Kw / 54 Hp
Maximum net torque	156 N.m
Aspiration	Natural
Engine displacement	2,67 ℓ


GENERAL CHARACTERISTICS

Lifting capacity	4.480,56 mm
Loading capacity	2.993,71 kg
Tower inclination angle	6/12 degrees
Maximum climbing angle (with load)	20%
Overhead guard height	2.133,6 mm
Wheeled (front/rear)	28X9-15-14PR / 6.50-10-10 PR
Distance from load center	500 mm
Lifting speed	584 mm/s
Travel speed	20 km/h
Wheelbase middle point	152 mm

DIMENSIONS

A – Load height	4.480,56 mm
B – Wheelbase	1.701,8 mm
C – Front axle distance	998,22 mm
D – Rear axle distance	977,9 mm
E – Length/Length without nails	3.169,92 / 1.066,8 mm
F – High (Low mast)	2.072,64 mm
G – Ancho	1.219,2 mm



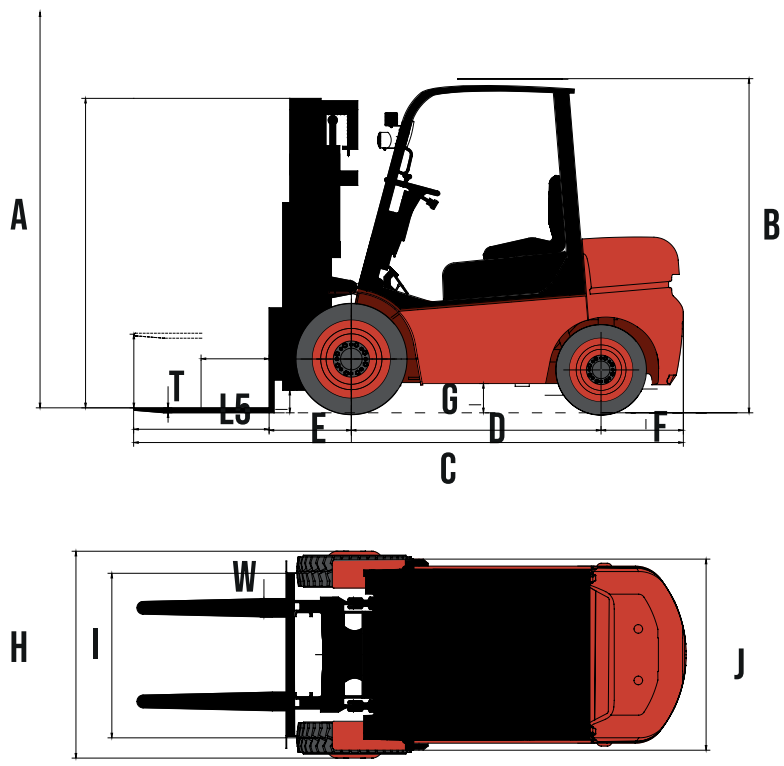

GLOBAL STRENGHTH AND TRADITION

MICHIGAN reserves the right to implement design improvements and changes in specifications at any time, without incurring any obligation to install them on units previously sold. The specifications, descriptions, and illustrative materials contained herein accurately reflect the data known at the time of publication, but may vary by region and are subject to change without prior notice. Illustrations may include optional equipment and accessories and may not include all standard equipment.

MANUFACTURED UNDER THE AUTHORITY OF MICHIGAN GROUP INC.
FLORIDA - USA, FL 33073

MICHIGAN®

+1 954 697 5718

LOGISTICS LINE